



Rigel i1200E

1200W High Power, Diode Pumped, Short Pulse Laser

Rigel i800E

Rigel i200E

Rigel i1600E

A 1.2 kW, Q-switched, DPSS laser, delivering high average power and high peak power at 1064 nm, unpolarised. With a well proven rugged head design, state of the art universal control system architecture and simple synchronisation with OEM equipment and process lines, this platform is ideally suited to high volume industrial applications.





Features

- Pulse Energy Up To 200 mJ
- M2 = 30
- Excellent Stability
- Condition Monitoring
- Fibre Delivery (Round Or Square)
- Optional Computer Controlled Attenuation
- Optional Repetition Frequency Optimisation

Applications

- Material Processing
- Photovoltaic Processing
- Thin Film Removal
- Rapid Laser Patterning
- Extreme Ultraviolet (EUV) Generation

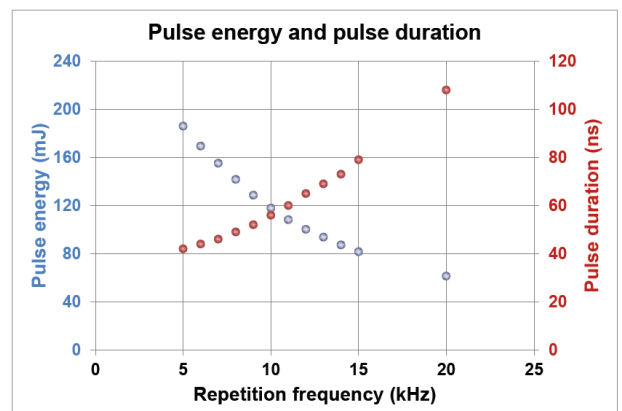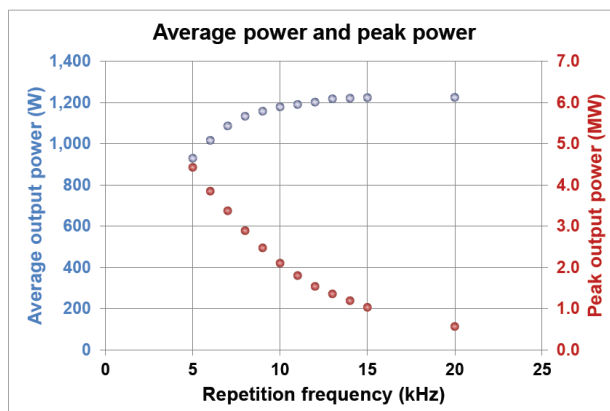

Doc No: 069-0066-4



Typical Laser Performance


Pulse Repetition Freq. (kHz)	5	10	15	20
Average Power (W)	930	1170	1200	1220
Pulse Energy (mJ)	> 200	117	80	61
Pulse Duration (ns)	42	60	80	105
Divergence (mrad, 1/e ² FA)	9			
M ²	30			
Power Stability (% , 1σ)	0.3			
Typical Fibre Core (μm)	Contact APL			

Facility Requirements

Supply Voltage	3-phase N+E, 220 or 400 VAC (±10%)
Supply Frequency	50 or 60 Hz
Nominal Power Consumption	23 kVA
Cooling Water	50 litres/min at 11 - 17°C
Gas Purge	N2 or Air (Grade N5.0, <1 ppm THC)
Laser Dimensions	1988 x 1657.6 x 927.4 mm
Environmental Conditions	Temp 15 - 50°C and RH <60% (90% max, non condensing)

Specifications subject to change without notice.

Dimensions

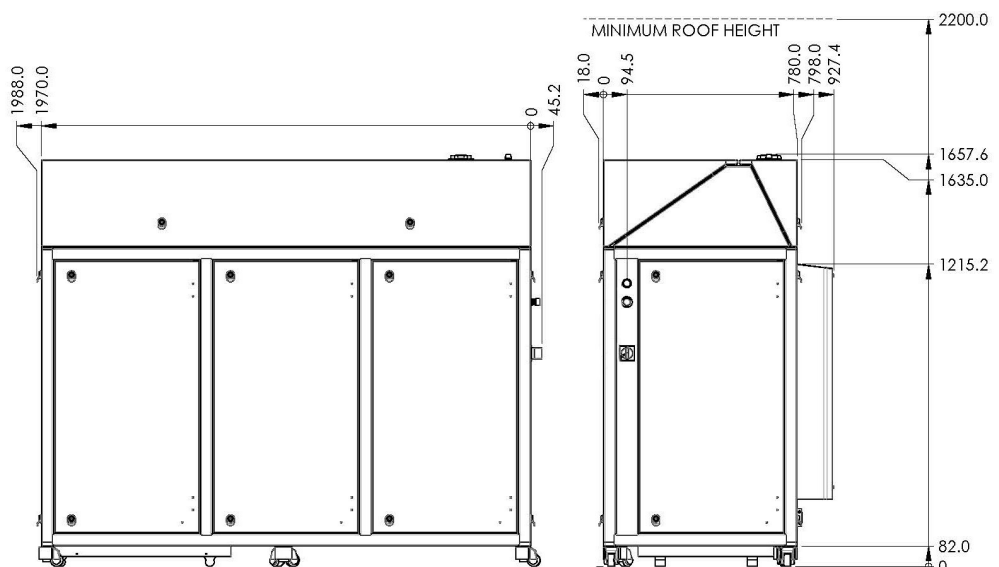

LASER RADIATION
AVOID EYE OR SKIN EXPOSURE TO
DIRECT OR SCATTERED RADIATION
CLASS 4 LASER PRODUCT

ANDRITZ Powerlase Ltd may make improvements and/or changes in the products described herein at any time without notice.

Doc No: 069-0066-4